

# Super Pump® VSTD

## THE ORIGINAL REVISITED

- 1 HP and 1,5 HP available
- Direct replacement of a single-speed Super Pump®
- Smart inverter + Permanent Magnet Motor: **electricity saving up to 85%\***
- Versatile and **extremely quiet**
- Easy to use **digital user interface**
- **180° rotary box for convenient access** to the user interface
- **Ease of installation for electrical connections**
- Recommended for pools **up to 70 m<sup>3</sup>\*\***

\* Running at low speed.  
Electricity savings of 65% are generally achieved.


\*\* Running at low speed 24 hours



2" (1,5" threaded adaptor included for 1HP)



The intuitive control module displays relevant information such as real-time energy consumption. Improved control box, with the addition of five daily programs. "Skimming" function that allows the surface to be automatically skimmed every 1, 2 or 3 hours. **Timer Mode.**

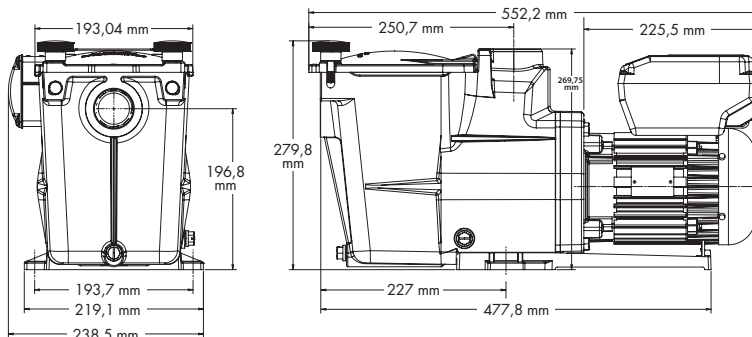


## Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, suitable for salt water
Motor-drive specifications	Class F, IP55, 50Hz, Brushless VFD
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC


### • 1 HP Curve

Pressure (mbar)

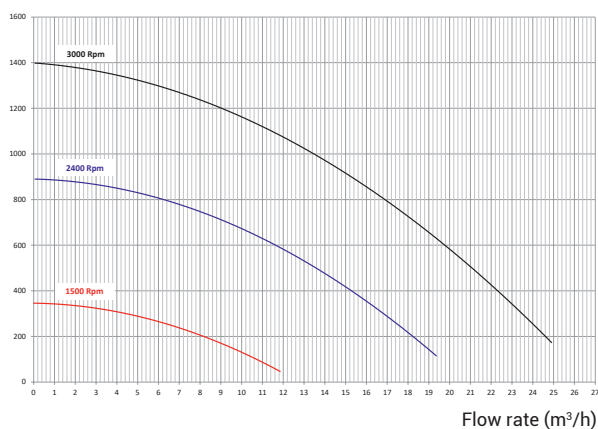

### • 1.5 HP Curve

Pressure (mbar)

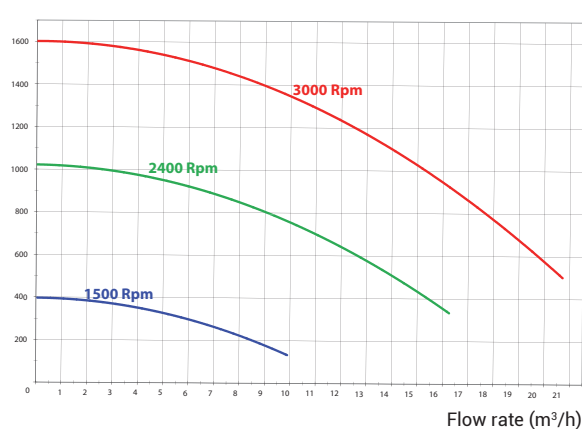

	Speed	Type	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage	Item
SUPER PUMP® VSTD	600 - 3000 RPM (20 rpm)	1 HP	2" / 1.5"	@10 m : 13.8 m³/h @8 m : 16.5 m³/h	950 W	750 W	4.4 A	SP2611VSTD
	600 - 3000 RPM (20 rpm)	1.5 HP	2"	@10 m : 16 m³/h @8 m : 18 m³/h	1240 W	1100 W	5.9 A	SP2616VSTD

\*at 3000 Rpm